


PCI Express Card to 2 x internal USB 3.2 Gen 2 key A 20 pin female

Description

This PCI Express card by Delock expands the PC by **two internal USB 3.2 key A 20 pin female ports**. Various cables can be connected to the card, to provide either one USB Type-C™ or one USB Type-A interface.

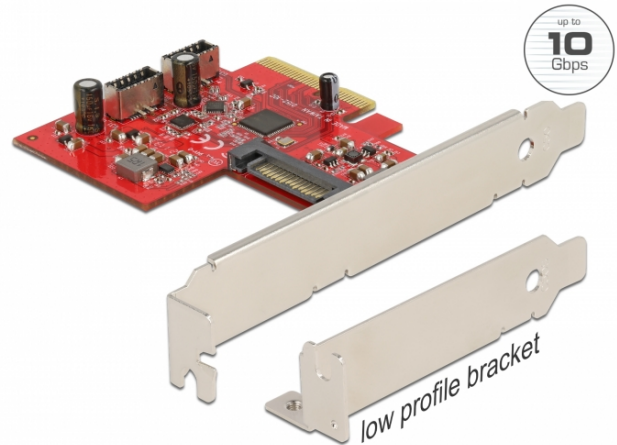

Specification

- Connectors:
internal:
2 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) key A 20 pin female
1 x SATA 15 pin power plug
1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142
- Data transfer rate up to:
SuperSpeed USB 10 Gbps,
SuperSpeed USB 5 Gbps,
Hi-Speed 480 Mbps,
Full-Speed 12 Mbps,
Low-Speed 1.5 Mbps
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Compliant with USB Attached SCSI Protocol (UASP) Rev. 1.0

System requirements

- Linux Kernel 5.8 or above
- Windows 8.1/8.1-64/10/10-64
- Windows Server 2019
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Optional: power supply with a free SATA power connector

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual


Item no. 90058

EAN: 4043619900589

Country of origin: Taiwan, Republic of China

Package: Retail Box

Images

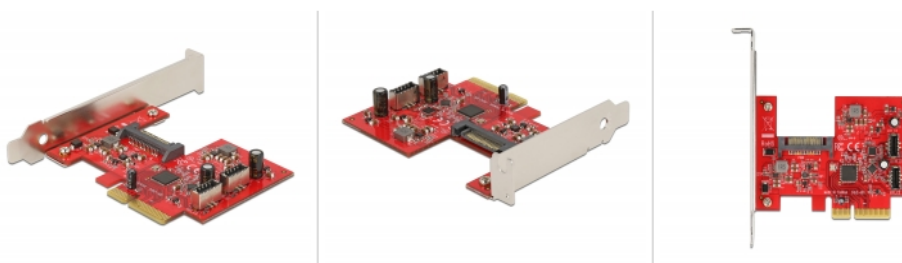

General

Supported operating system:

- Linux Kernel 5.8.0 or above
- Windows 10 32-bit
- Windows 10 64-bit
- Windows 8.1 32-bit
- Windows 8.1 64-bit

Interface

Internal:

- 1 x PCI Express x4, V3.0
- 1 x SATA 15 pin power plug
- 2 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) key A 20 pin female

Technical characteristics

Chipset: Asmedia ASM3142

Physical characteristics

Slot bracket:

- low profile
- standard