


# Delock PCI Express 4.0 x16 Card to 4 x internal U.2 NVMe SFF-8639 - Bifurcation

## Description

This PCI Express card by Delock expands the PC by **four U.2 interfaces**. It supports the connection of up to four **U.2 SSDs in 2.5" format**.

### PCIe Bifurcation

The card requires the PCIe bifurcation of the motherboard to **split the PCIe signal** in order to use multiple ports.

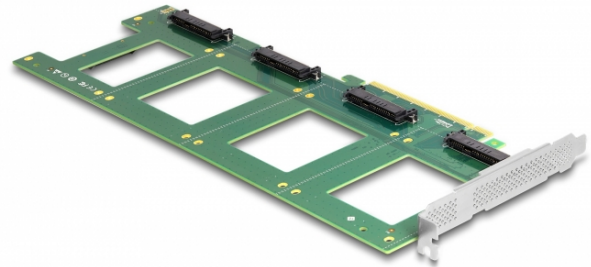

## Note

Without PCIe bifurcation only the first SFF-8639 port of the card can be used.

## Specification

- Connectors:
  - internal:
    - 4 x U.2 SFF-8639 female
    - 1 x PCI Express x16, V4.0
    - 1 x SATA 15 pin plug (optional for power supply)
- Supports NVM Express (NVMe)
- 4 x LED indicator for power and activity
- Bootable, ex UEFI version 2.3.1
- Supports S.M.A.R.T.
- Supports TRIM
- 16 x mounting holes
- Humidity: 15 ~ 90 %
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -25 °C ~ 70 °C

## System requirements

- Linux Kernel 5.11 or above
- Windows 8.1/8.1-64/10/10-64/11
- Windows Server 2019
- PC with one free PCI Express x8 / x16 / x32 slot
- Motherboard and BIOS with PCIe bifurcation support

## Package content

- PCI Express card
- 16 x screw
- User manual


## Item no. 90092

EAN: 4043619900923

Country of origin: China

Package: Box

Images



**General**

<b>Function:</b>	Bootable, ex UEFI 2.3.1 TRIM S.M.A.R.T.
<b>Supported operating system:</b>	Windows 10 32-bit Windows 10 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows Server 2019 Windows 11 Linux Kernel 5.11 or above
<b>LED indicator:</b>	4 x

**Interface**

<b>Internal:</b>	4 x U.2 SFF-8639 Buchse 1 x PCI Express x16, V4.0
------------------	--