

Delock PCI Express 4.0 x8 Card to 2 x internal U.2 NVMe SFF-8639 - Bifurcation (LxW: 236 x 87 mm)

Description


This PCI Express card by Delock expands the PC by **two U.2 interfaces**. It supports the connection of up to two U.2 SSDs in 2.5" format.

PCIe Bifurcation

The card requires the **PCIe bifurcation** of the motherboard to split the PCIe signal in order to use multiple ports.

Note

Without PCIe bifurcation only the first SFF-8639 port of the card can be used.

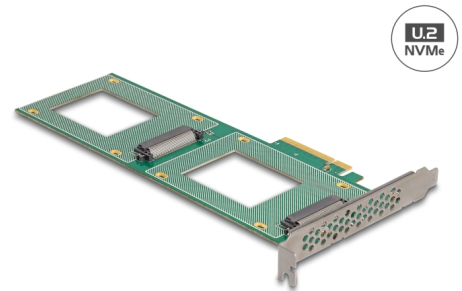

Item no. 90151

EAN: 4043619901517

Country of origin: China

Package: Box

Specification

- Connectors:
internal:
2 x U.2 SFF-8639 female
1 x PCI Express x8, V4.0
- Supports NVM Express (NVMe)
- 2 x LED indicator for power and activity
- Bootable, ex UEFI version 2.3.1
- Supports S.M.A.R.T.
- Supports TRIM
- 8 x mounting holes

System requirements


- Linux Kernel 5.19 or above
- Windows 10/10-64/11
- Windows Server 2019
- PC with one free PCI Express x8 / x16 / x32 slot

- Motherboard and BIOS with PCIe bifurcation support

Package content

- PCI Express card
- 8 x screw
- User manual

Images

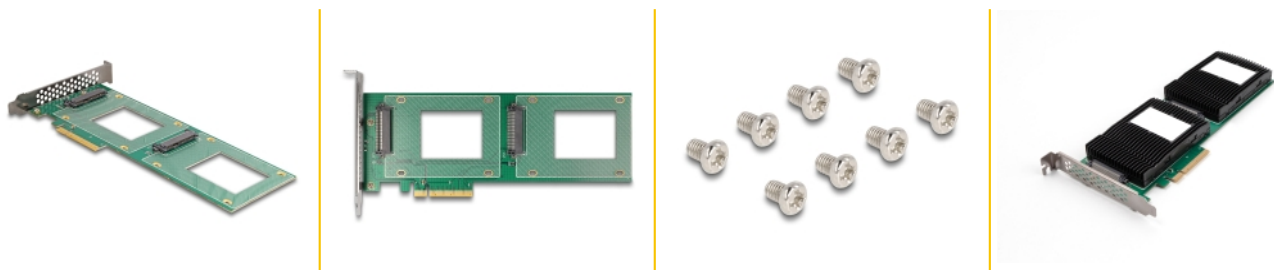

General

| | |
|-----------------------------|--|
| Function: | Bootable, ex UEFI 2.3.1 TRIM S.M.A.R.T. |
| Supported operating system: | Windows 10 32-Bit Windows 10 64-Bit Windows 11 Windows Server 2022 Linux Kernel 6.2 or above |
| LED indicator: | 2 x |

Interface

| | |
|-----------|---|
| Internal: | 1 x PCI Express x8, V4.0 2 x U.2 SFF-8639 female |
|-----------|---|