


# Delock MiniPCle I/O PCle full size 1 x FireWire A, 2 x FireWire B

## Description

This miniPCle adapter by Delock expands your system by one FireWire A port and two FireWire B ports, which you can lead out via the slot bracket. You can connect different FireWire devices like Card Reader, hubs, cameras etc. to this adapter.

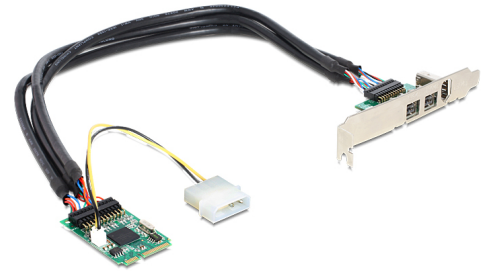

**Item no. 95236**

EAN: 4043619952366

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Specification

- Chipset: LSI-LFW643E2
- Form factor: miniPCle full size
- Interface: PCI Express revision 1.2
- Connector:
  - internal:
    - 1 x 2 pin power connector
  - externally on the bracket:
    - 1 x FireWire 1394A 6 pin female
    - 2 x FireWire 1394B 9 pin female
- Data transfer rate:
  - FireWire A up to 400 Mb/s
  - FireWire B up to 800 Mb/s
- Supports OHCI specifications V1.1
- Hot Swap
- Cable length with connector:
  - FireWire ca. 46 cm
  - power cable ca. 17 cm
- Operating temperature: -10 °C ~ 80 °C

---

## System requirements

- Windows Vista/7/7-64/8/8-64/8.1/8.1-64/10/10-64
- Mainboard with a free miniPCle slot with a PCIe interface
- PC with one free slot

---

## Package content

- MiniPCle module
- Connecting cable
- FireWire bracket
- 1 Molex power cable
- 2 screws
- User manual

---

## Images

