


Delock Module MiniPCIe I/O PCIe full size 2 x Serial RS-232 + 1 x Parallel

Description

This MiniPCIe adapter by Delock expands your system by two additional serial and one parallel port, which you can lead out through the slot bracket. You can connect different serial and parallel devices like printer, scanner, modem etc. to this adapter.

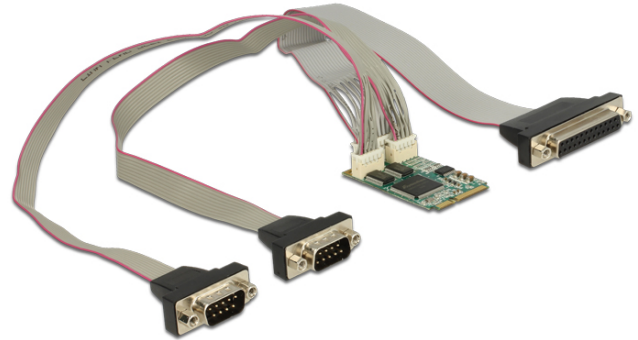

Specification

- Connector:
 - on the module:
 - 2 x 10 pin pin header male (serial)
 - 1 x 18 pin pin header male (parallel)
 - on the slot bracket (standard) 2 x:
 - 2 x serial RS-232 DB9 male with screw nuts
 - 1 x parallel male with screw nuts
 - or on the slot bracket (low profile) 3 x:
 - 1 x serial RS-232 DB9 male with screw nuts
 - 1 x parallel male with screw nuts
- Chipset: Systembase SB16C1053
- Form factor: MiniPCIe full size
- Interface: PCI Express revision 2.0
- Data transfer rate up to 921.6 Kb/s
- Compatible with 16C550 UART
- Cable length: ca. 30 cm (incl. connector)

System requirements

- Windows Vista/Vista-64/7/7-64/8/8-64/8.1/8.1-64/10/10-64, Linux Kernel 2.6
- Mainboard with a free MiniPCIe slot with a PCIe interface

Package content

- MiniPCIe module
- 2 x serial connection cable (pin header > DB9)
- 1 x parallel connection cable (pin header > DB25)
- Power cable
- 2 x standard slot bracket
- 3 x low profile slot bracket
- Driver CD
- User manual

Item no. 95246

EAN: 4043619952465

Country of origin: Taiwan, Republic of China

Package: Box

Images

