


Delock Module MiniPCIe I/O PCIe full size Graphics Adapter for VGA / DVI / HDMI -40 °C ~ 85 °C

Description

This Mini PCIe adapter by Delock expands the PC by two monitor interfaces. VGA, DVI or HDMI monitors can be connected to these interfaces by using the optional cables. The adapter has an extended temperature range of -40 °C ~ 85 °C.

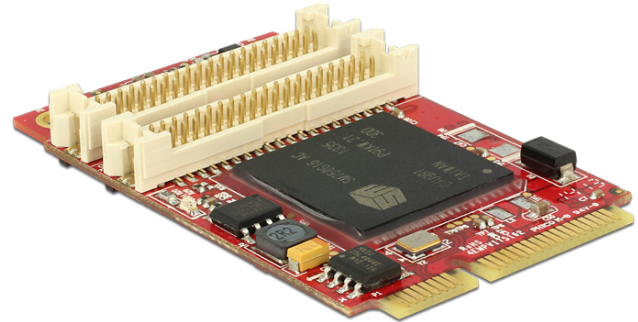

Note

The following connection cables are available as an option:

- Item no. 84710 - 40 pin 1.25 mm > 2 x VGA
- Item no. 84711 - 40 pin 1.25 mm > 1 x HDMI
- Item no. 85252 - 40 pin 1.25 mm > 1 x DVI-D

Specification

- Connector:
 - 2 x 40 (40 DP) 1.25 mm pin header
 - 1 x Mini PCI Express, Rev. 1.0
- Interface: PCI Express revision 1.0
- Formfaktor: Mini PCIe full size
- Chipset: SM750
- Resolution VGA up to 1920 x 1080 @ 75 Hz
- Resolution HDMI up to 1080p
- Resolution DVI-D up to 1080p - Single Link
- Supports simultaneous on two displays
- Power consumption: ca. 600 mA
- Operating temperature: -40 °C ~ 85 °C Industrial grade
- Storage temperature: -55 °C ~ 95 °C
- Vibration: 5 G @ 7 ~ 2000 Hz
- Schock: 50 G @ 0.5 ms

System requirements

- Windows 7/7-64/8.1/8.1-64/10-64, Linux Ubuntu-Fedora-RedHeat
- PC with one free Mini PCI Express slot
- Connection cable

Package content


- Graphics adapter

Item no. 95255



EAN: 4043619952557

Country of origin: Taiwan, Republic of China

Package: • Antistatic cover



Images



General	
Form factor:	Mini PCIe full size
Supported operating system:	Windows 7 32-bit Windows 7 64-bit Windows 8 64-bit Windows 8.1 64-bit Windows 10 64-bit
Interface	
External:	2 x VGA 1 x HDMI 1 x DVI-D
Internal:	2 x 40 pin 1.25 mm (40 DP) pin header
Technical characteristics	
Chipset:	SM750
Storage temperature:	-55 °C - 95 °C
Operating temperature:	-40 °C ~ 85 °C
Interface:	PCI Express
Shock:	50 G @ 0.5 ms
Current consumption:	600 mA
Vibration:	5 G @ 7 ~ 2000 Hz