


Delock Module MiniPCIe I/O PCIe full size Graphics Adapter for VGA / DVI / HDMI

Description

This Mini PCIe adapter by Delock expands the PC by two monitor interfaces. VGA, DVI or HDMI monitors can be connected to these interfaces by using the optional cables.

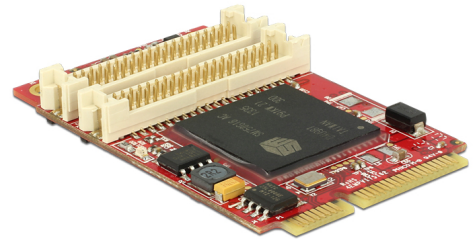

Note

The following connection cables are available as an option:

Item no. 84710 - 40 pin 1.25 mm > 2 x VGA

Item no. 84711 - 40 pin 1.25 mm > 1 x HDMI

Item no. 85252 - 40 pin 1.25 mm > 1 x DVI-D

Item no. 95256

EAN: 4043619952564

Country of origin: Taiwan,
Republic of China

Package: Box

Specification

- Connector:
 - 2 x 40 (40 DP) 1.25 mm pin header
 - 1 x Mini PCI Express, Rev. 1.0
- Interface: PCI Express revision 1.0
- Formfaktor: Mini PCIe full size
- Chipset: SM750
- Resolution VGA up to 1920 x 1080 @ 75 Hz
- Resolution HDMI up to 1080p
- Resolution DVI-D up to 1080p - Single Link
- Supports simultaneous on two displays
- Power consumption: ca. 600 mA
- Operating temperature: 0 °C ~ 70 °C
- Storage temperature: -55 °C ~ 95 °C
- Vibration: 5 G @ 7 ~ 2000 Hz
- Schock: 50 G @ 0.5 ms


System requirements

- Windows 7/7-64/8.1/8.1-64/10-64, Linux Ubuntu-Fedora-RedHeat
- PC with one free Mini PCI Express slot
- Connection cable

Package content

- Graphics adapter

Images

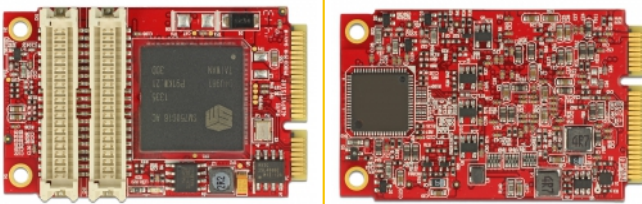

General

Form factor:	Mini PCIe full size
Supported operating system:	Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 64-bit Windows 8.1 64-Bit

Interface

External:	1 x DVI-D 1 x HDMI 2 x VGA
Internal:	2 x 40 pin 1.25 mm (40 DP) pin header

Technical characteristics

Chipset:	SM750
Storage temperature:	-55°C - 95°C
Operating temperature:	0 °C ~ 70 °C
Interface:	PCI Express
Shock:	50 G @ 0.5 ms
Current consumption:	600 mA
Vibration:	5 G @ 7 ~ 2000 Hz