


Delock Mini PCIe Converter to 2 x SATA with RAID

Description

This converter by Delock expands the system by two SATA ports. When using more than one SATA port, there is the possibility to use different RAID modes.

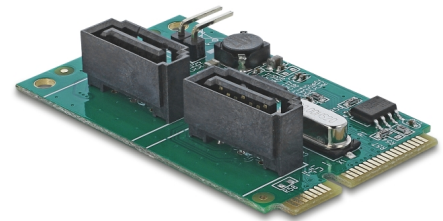

Note

This product provides a chipset-based RAID function. Management and setting of the RAID mode is not possible via the operating system or BIOS. Different diagnostic software is not compatible with this solution.

Item no. 95264

EAN: 4043619952649

Country of origin: China

Package: Retail Box

Specification

- Connectors:
 - 1 x Mini PCIe male
 - 2 x SATA 6 Gb/s 7 pin plug
 - 1 x 2 pin pin header for LED
- Chipset: Asmedia ASM1061R
- Interface: PCI Express revision 2.0
- Data transfer rate:
 - SATA up to 6 Gb/s
 - PCI Express up to 5 Gb/s
- Supports RAID 0, 1, SPAN
- Supports hard drive with Native Command Queue (NCQ) feature
- Supports SATA Port Multiplier
- Supports S.M.A.R.T.
- Supports TRIM

System requirements


- Linux Kernel 3.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11

- Motherboard with a free Mini PCIe slot with a PCIe interface

Package content

- Mini PCIe module
- Driver CD
- User manual

Images



General

Supported operating system:	Linux Kernel 3.3 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
-----------------------------	---

Interface

Connector 1:	1 x Mini PCIe male
Connector 2:	2 x SATA 6 Gb/s 7 pin plug
connector 3:	1 x 2 pin pin header for LED

Technical characteristics

Chipset:	Asmedia ASM1061R
RAID function:	SPAN 0 1