


Delock Mini DisplayPort 1.2 to VGA adapter with latch passive

Description

This mini DisplayPort adapter by Delock can be used to connect a VGA monitor to graphics cards with mini DisplayPort ports that have special notches in the slot bracket above the ports. The additional latch of the plug of the adapter snaps into the notch and prevents the adapter from being pulled out unintentionally.

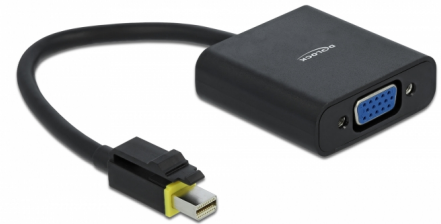

Item no. 65981

EAN: 4043619659814

Country of origin: China

Package: Zip poly bag

Specification

- Connectors:
 - 1 x mini DisplayPort male with latch >
 - 1 x VGA female
- Chipset: Analogix ANX9833
- DisplayPort 1.2 specification
- Passive converter (level shifter), suitable only for graphics cards with DP++ output
- Cable gauge: 32 AWG
- Cable diameter: ca. 4.8 mm
- Contacts gold-plated
- LS0H (halogen-free)
- Resolution up to 1920 x 1200 @ 60 Hz
(depending on the system and the connected hardware)
- Transfer of digital video signals
- Cable length incl. connectors: ca. 15 cm
- Colour: black

System requirements

- A free mini DisplayPort DP++ female

Package content

- Adapter mini DisplayPort to VGA

Images



General

Specification:	DisplayPort 1.2
----------------	-----------------

Interface

Connector 1:	1 x mini DisplayPort male
Connector 2:	1 x VGA 15 pin female

Technical characteristics

Chipset:	Analogix ANX9833
Maximum screen resolution:	1920 x 1200 @ 60 Hz

Physical characteristics

Cable length:	15 cm
Pin finishing:	gold-plated
Conductor gauge:	32 AWG
Colour:	black
Cable diameter:	4.8 mm