


Delock Terminal block for PCB soldering version 3 pin 5.08 mm pitch vertical 10 pieces

Description

This terminal block by Delock is suitable for the mounting on a PCB. This can be soldered on a board, to create a screw connection. Furthermore, data or power cables can be connected via the terminal block.

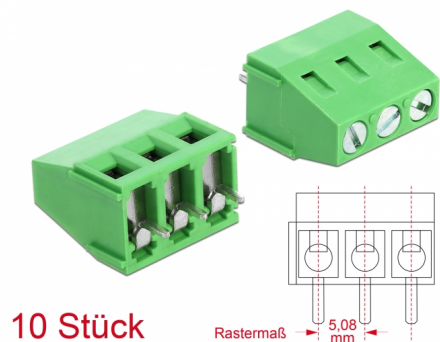

Item no. 66010

EAN: 4043619660100

Country of origin: China

Package: Zip poly bag


Specification

- Connectors:
 - 1 x 3 pin terminal block screw terminal
 - 1 x 3 soldering pin
- Pitch: 5.08 mm
- Environmental temperature: -40 °C ~ 105 °C
- Useable for a cable gauge from 24 to 12 AWG
- Withstanding voltage: AC 2000 V / 1 min
- Rated voltage according to: UL: 300 V, IEC: 250 V
- Rated current according to: UL: 10 A, IEC: 18 A
- Insulation resistance: 500 MΩ / DC 500 V
- Material: plastic
- Colour: green
- Dimensions (LxWxH): ca. 15.0 x 13.9 x 9.9 mm

Package content

- 10 x Terminal block

Images

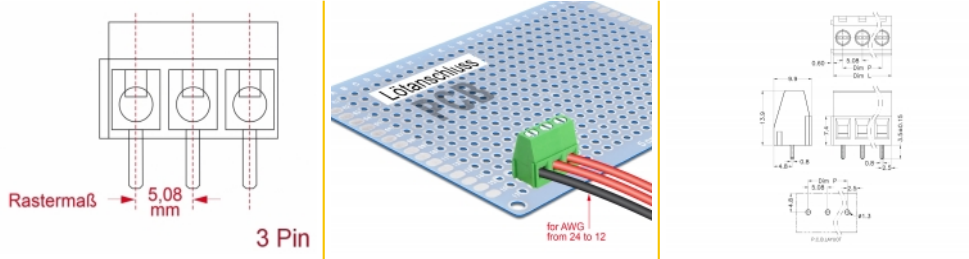

General

| | |
|-------------------------------|-------------|
| Suitable for conductor gauge: | 24 - 12 AWG |
| Mounting type: | Soldering |

Interface

| | |
|--------------|---|
| Connector 1: | 1 x 3 pin terminal block screw terminal |
| Connector 2: | 1 x 3 soldering pin |

Technical characteristics

| | |
|----------------------|-------------------|
| Storage temperature: | -40 °C ~ 105 °C |
| Resistor: | 500 MΩ / DC 500 V |

Physical characteristics

| | |
|-------------------|---------|
| Pitch distance: | 5.08 mm |
| Housing material: | Plastic |
| Length: | 15.0 mm |
| Width: | 13.9 mm |
| Height: | 9.9 mm |
| Colour: | green |