

Delock Mobile Rack PCI Express Card for 1 x M.2 NVMe SSD - Low Profile Form Factor

Description

This mobile rack by Delock can be installed into a free PC slot of the computer and provides an **M.2 slot** in 2280, 2260, 2242 or 2230 format.

Quick change of SSD


Due to the special mechanism, the SSD can be **exchanged quickly and easily**. For example, data backups can be taken and stored in a safe place.

Metal tray with springs

The stable carrier of metal has springs on the top and bottom which **reduce vibrations**.

Note

Care must be taken that the tray is fully inserted, otherwise no connection to the SSD can be established.

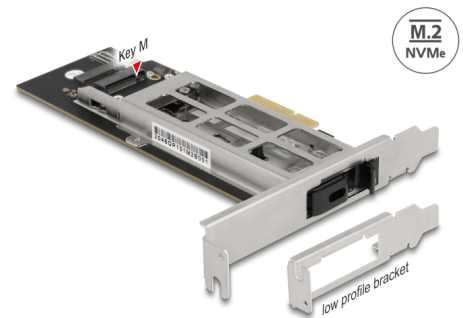

Item no. 47003

EAN: 4043619470037

Country of origin: China

Package: Box

Technical details

- Connectors:
 - PCIe card:
 - 1 x PCI Express x4, V3.0
 - 1 x 67 pin M.2 key M slot
 - M.2 tray:
 - 1 x 67 pin M.2 Key M male
 - 1 x 67 pin M.2 key M slot
- Interface: PCIe / NVMe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- 1 x LED indicator
- Bootable, ex UEFI version 2.3.1

- M.2 tray made of metal
 - Data transfer rate up to 32 Gbps
 - Supports NVMe Express (NVMe)
 - Supports S.M.A.R.T.
 - Operating temperature: -40 °C ~ 85 °C
-

System requirements

- Linux Kernel 5.4 or above
 - Windows 8.1/8.1-64/10/10-64
 - Windows Server 2016
 - PC with one free PCI Express x4 / x8 / x16 / x32 slot
-

Package content

- Mobile Rack
- M.2 tray
- Low profile bracket
- Heat sink
- 1 x thermal conductive pad
- Screws
- User manual

Images



General

Form factor:	Low Profile
Supported operating system:	Linux Kernel 5.4 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2016

Interface

Internal:	1 x 67 pin M.2 key M slot 1 x PCI Express x4, V3.0
-----------	---

Technical characteristics

Data transfer rate:	32 Gbps
---------------------	---------