


# Delock M12 Connector A-coded 4 pin male for mounting with screw connection 90° angled metal

## Description

This connector by Delock can be used to connect a cable via a screw terminal connection with an M12 connector, e.g. for machine control or automation.

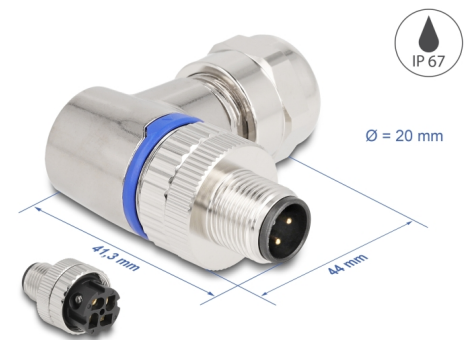

**Item no. 60540**

EAN: 4043619605408

Country of origin: China

Package: Zip poly bag

## Specification

- Connectors:
  - 1 x M12 male A-coded 4 pin
  - 4 x screw terminal
- Housing material: metal
- Useable for a cable gauge range from 26 to 20 AWG (0.13 - 0.52 mm<sup>2</sup>)
- Operating voltage: max. 250 V
- Current: max. 4 A
- Operating temperature: -25 °C ~ 85 °C
- Protection class: IP67
- Cable entry max. 3.0 - 8 mm
- Thread size: M12 x 1.0 mm
- Colour: black
- Dimensions (LxWxD): ca. 44,0 x 41,3 x 20,0 mm

## System requirements

- A free M12 female port

---

## Package content

- Connector
- 

## Images



## Interface

Connector 1:	1 x M12 plug
--------------	--------------

## Technical characteristics

Operating voltage:	250 V
Operating temperature:	-25 °C ~ 85 °C
Current consumption:	4 A

## Physical characteristics

Housing material:	metal
Pin finishing:	gold-plated
Diameter:	20 mm
Length:	44 mm
Width:	41.3 mm
Colour:	silver