


# Converter M.2 Key B+M male to 1 x Mini PCIe Slot half size / full size with flexible cable

## Description

This converter by Delock changes the **M.2 key B or key M interface** into a **Mini PCIe interface**. Different **Mini PCIe modules with USB and PCIe** signals can be inserted in the converter. On the M.2 key B or key M interface can be used e.g. WLAN, Bluetooth, GNSS, 4G, 5G, HSPA and NFC modules. Further it is possible to use **both functions** of a module which has e.g. WLAN and Bluetooth.

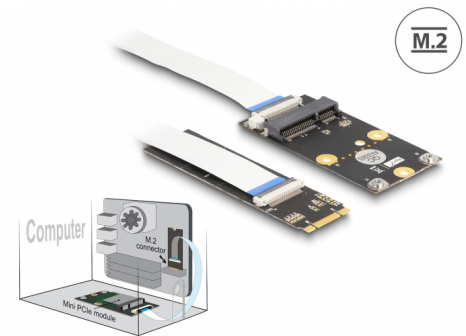

**Item no. 64221**

EAN: 4043619642212

Country of origin: China

Package: Retail Box

## Specification

- Connectors:
  - 1 x M.2 key B+M male
  - 1 x Mini PCIe slot
  - 1 x 2 pin pin header male for USB connection
- PCI Express Rev. 2.0
- Interface: PCIe + USB
- Form factor M.2: 2280
- Form factor Mini PCIe: half size and full size
- Suitable for M.2 slot with key M or B based on PCIe
- Dimensions (LxWxH):
  - M.2 board: ca. 80 x 22 x 3 mm
  - Mini PCIe board: ca. 66 x 32 x 5 mm


## System requirements

- A free M.2 key B or key M slot

## Package content

- Converter board M.2
- Mini PCIe board
- 3 x flat cable, length ca.: 1 x 10 cm, 1 x 20 cm, 1 x 30 cm
- Cable 2 pin to USB 2.0 pin header female, length ca. 40 cm
- Cable 2 pin to open ends, length ca. 40 cm
- Mini PCIe Extension
- Screws
- Screwdriver
- User manual

## Images

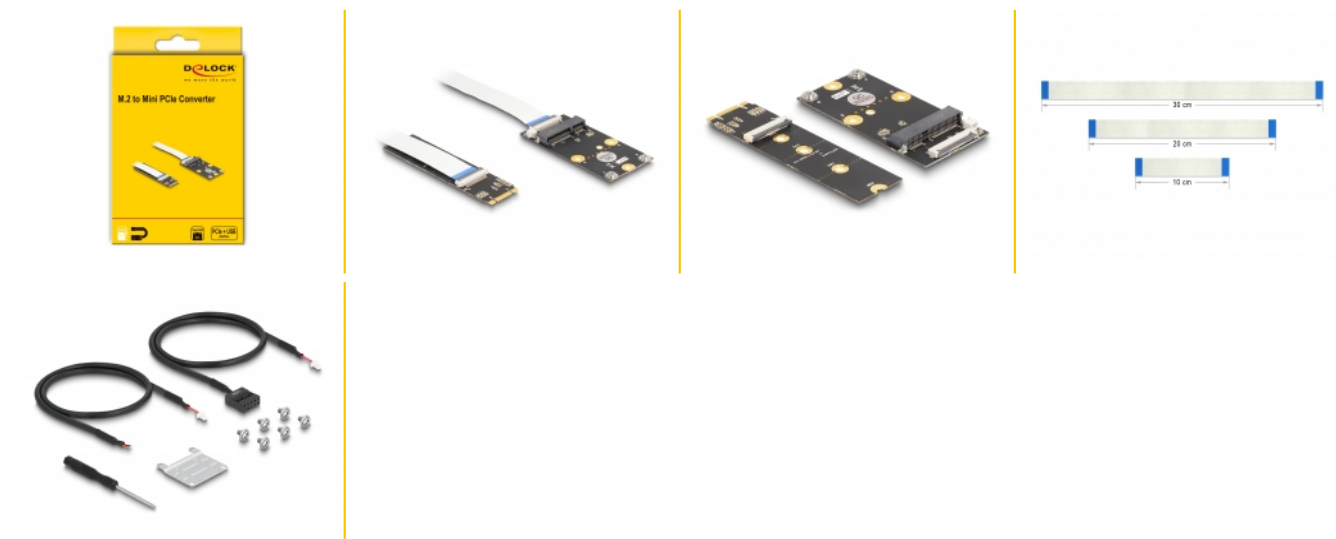

## General

|              |             |
|--------------|-------------|
| Form factor: | M.2 2280    |
| Slot:        | PCIe<br>USB |

## Interface

|              |                                              |
|--------------|----------------------------------------------|
| Connector 1: | 1 x M.2 key B+M male                         |
| Connector 2: | 1 x Mini PCIe slot                           |
| connector 3: | 1 x 2 pin pin header male for USB connection |