

# Delock Adapter cable USB Type-A to Serial RS-232 RJ12 with ESD protection Leadshine 2 m

## Description

This USB to serial RS-232 RJ12 adapter cable by Delock is suitable with the ProTuner software for configuration, control, monitoring etc. of the servo and stepper motors by Leadshine.


### Compatible Devices:

Stepper motors:

DM432C, DM442, DM556, DM856 3DM683 AM882  
DM1182 DM2282

Servomotors:

DCS810, DCS810S, ACS306, ACS606, ACS806

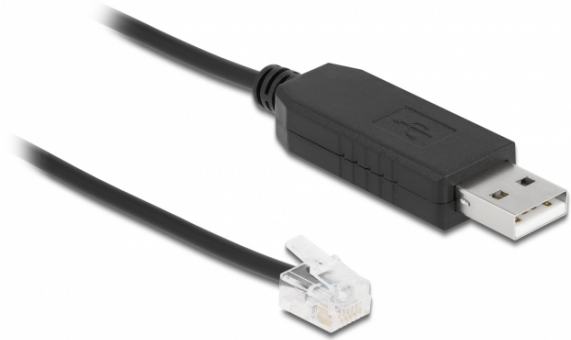

2 m

## Specification

- Connectors:
  - 1 x USB 2.0 Type-A male
  - 1 x Serial RS-232 RJ12 plug
- Chipset: FTDI FT231X
- Plug & Play
- ESD protection:
  - FIFO: 512 Byte - TX
  - FIFO: 512 Byte - RX
  - Compatible with USB 3.0, USB 2.0, and USB 1.1 full speed 12 Mbps
  - Data transfer rate up to 230.4 Kb/s
  - Signals: RXD(3), GND(4), TXD(5)
  - ESD protection IEC 61000-4-2
    - HCP & VCP:  $\pm 4$  kV
    - Air Discharge:  $\pm 8$  kV
    - Contact Discharge:  $\pm 4$  kV
- Colour: black
- Cable length incl. connectors: ca. 2.0 m
- Suitable for various devices by Leadshine

## Item no. 66737

EAN: 4043619667376

Country of origin: China

Package: • Zip poly bag

## System requirements

- Windows 8.1/8.1-64/10/10-64
- PC or laptop with a free USB Type-A port

## Package content

- Adapter cable USB 2.0 Type-A to RS-232 RJ12

## Images



General	
Specification:	RS-232 (EIA / TIA) USB 2.0
Supported operating system:	Windows 10 32-bit Windows 10 64-bit Windows 8.1 32-bit Windows 8.1 64-bit
Interface	
Connector 1:	1 x USB 2.0 Type-A male
Connector 2:	1 x RJ12 plug
Technical characteristics	
Chipset:	FTDI FT231XS
Data transfer rate:	bis zu 230,4 Kbps
FIFO:	2 x 512 Byte
Signal transmission:	TxD, RxD und GND
UART:	USB to serial UART
Physical characteristics	
Cable length incl. connector:	2 m
Colour:	black
Overvoltage protection:	±8 kV EN / IEC 61000-4-2 Air Gap Discharge ±4 kV EN / IEC 61000-4-2 Contact Discharge ±4 kV EN / IEC 61000-4-2 VCP & HCP