

# Delock Serijski kabel RS-232 D-Sub9 ženski na ženski 2 m nulti modem

## Opis

Ovaj serijski kabel tvrtke Delock je **potpuno ožičeni nulti modemska kabel** za modem, pisač, mjerne instrumente, pretvarače, RS-232 koncentratorne, patch panele, itd. Ovim kabelom dva serijska RS-232 uređaja mogu se izravno spojiti jedan na drugog radi razmjene podataka.

## Mini D-Sub9 spojnik

Ovi kabeli pristaju svakom ulazu tipa RS-232, jer su mini D-Sub9 (44 x 33,3 x 15 mm) spojnici maleni i kompaktni. Tako se RS-232 spojnici mogu koristiti odmah jedan pored drugog.

**2 m**

## Tehnički podaci

- Priključak:
  - 1 x serijska ženski D-Sub9 s vijcima >
  - 1 x serijska ženski D-Sub9 s vijcima
- Presjek kabela: 28 AWG
- Potpuno ožičeni kabel
- Dodjeljivanje pinova: 1+6 - 4, 2 - 3, 3 - 2, 4 - 1+6, 5 - 5, 7 - 8, 8 - 7, oklopljen
- Boja: crno
- Izolator: PVC
- Vrsta vijka: #4-40 UNC
- Promjer kabela: oko 5 mm
- Duljina kabela zajedno s priključkom: oko 2 m

## Preduvjeti sustava

- Slobodan D-Sub9 muški priključak.

## Sadržaj pakiranja

- Kabel


## Predmet br. 86605

EAN: 4043619866052

Zemlja podrijetla: China

Pakiranje: Plastična vrećica sa zip zatvaračem

## Slike

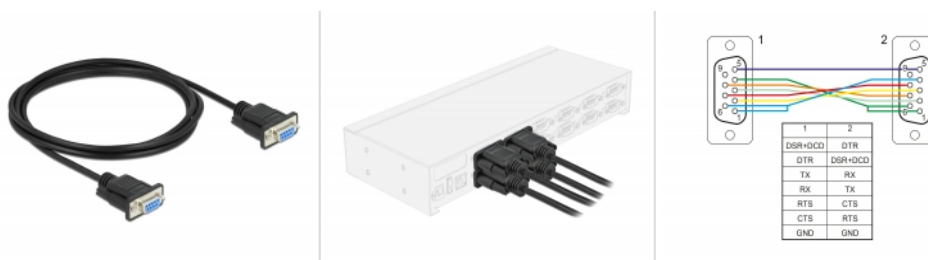



General	
Tehnički podaci:	RS-232 (EIA / TIA)
Style:	Null Modem Mini Sub-D9
Interface	
Priključak 1:	1 x serijska ženski D-Sub 9 s vijcima
Priključak 2:	1 x serial Sub-D 9 female with screws
Technical characteristics	
Brzina prijenosa podataka:	up to 921.6 Kbps
Signal transmission:	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Physical characteristics	
Cable type:	AWM Style 2464 28 AWG 80 °C 300 V VW-1
Promjer kabela:	5 mm
Cable length incl. connector:	2 m
Površinska zaštita kontakata:	pozlaćeni
Conductor material:	Copper tinned
Conductor gauge:	AWG 28
Vrsta vijka:	#4-40 UNC
Shielding:	Aluminum foil
Boja:	crni
Cable jacket material:	PVC
Safety of Flammability:	VW-1