

# Delock Serijski kabel RS-232 D-Sub9 muški na ženski 0,5 m

## Opis

Ovaj serijski kabel tvrtke Delock prikladan je kao **produžni kabel ili spojni kabel** za modem, pisač, mjerne instrumente, pretvarače, RS232 koncentrator, patch panele, itd. Kabel omogućava spajanje susjednih sustava i uređaja.

### Mini D-Sub9 spojnik

Ovi kabeli pristaju svakom ulazu tipa RS-232, jer su mini D-Sub9 (44 x 33,3 x 15 mm) spojnici maleni i kompaktni. Tako se RS-232 spojnici mogu koristiti odmah jedan pored drugog.



0,5 m

### Predmet br. 86613

EAN: 4043619866137

Zemlja podrijetla: China

Pakiranje: Plastična vrećica sa zip zatvaračem

## Tehnički podaci

- Priključak:
  - 1 x serijska muška D-Sub9 s vijcima >
  - 1 x serijska ženski D-Sub9 s vijcima
- Presjek kabela: 28 AWG
- Dodjeljivanje pinova: 1:1
- Boja: crno
- Izolator: PVC
- Vrsta vijka: #4-40 UNC
- Promjer kabela: oko 5 mm
- Duljina kabela zajedno s priključkom: oko 0,5 m

## Preduvjeti sustava

- Jedan slobodan D-Sub9 ženski
- Slobodan D-Sub9 muški priključak.


---

## Sadržaj pakiranja

- Kabel

---

## Slike

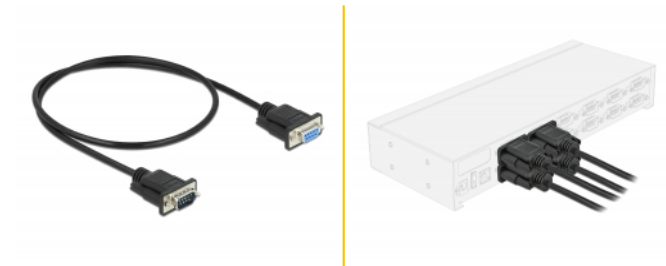

## General

Tehnički podaci:	RS-232 (EIA / TIA)
Style:	Connection- / Extensioncable Mini Sub-D9

## Interface

Priključak 1:	1 x serijska muška Sub-D 9 s vijcima
Priključak 2:	1 x serial Sub-D 9 female with screws

## Technical characteristics

Brzina prijenosa podataka:	up to 921.6 Kbps
Signal transmission:	TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND

## Physical characteristics

Cable type:	AWM Style 2464 28 AWG 80 °C 300 V VW-1
Cable length incl. connector:	0,5 m
Površinska zaštita kontakata:	pozlaćeni
Conductor material:	Copper tinned
Conductor gauge:	AWG 28
Vrsta vijka:	#4-40 UNC
Shielding:	Aluminum foil
Boja:	crne
Cable jacket material:	PVC
Safety of Flammability:	VW-1