


## Delock PCI Express x1 kartica na 1 x 2,5 Gigabit LAN

### Opis

Delock PCI Express kartica sadrži dva mrežna priključka brzine prijenosa podataka do 2500 Mbps.

### NBASE-T za veću brzinu

Suvremene usluge i nove tehnologije zahtijevaju veće pojasne širine. NBASE-T tehnologija omogućava brzine od 1 Gbps i 2,5 Gbps s konvencionalnim radnim mrežnim kabelima. Idealni prijenos postavlja se automatski.

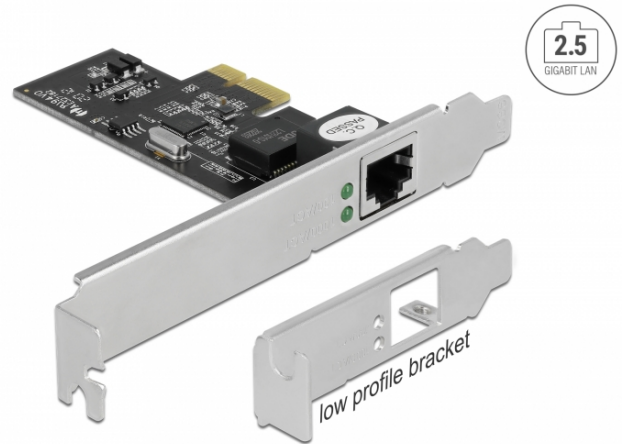

### Tehnički podaci

- Priključak:  
vanjski: 1 x 2,5 Gigabit LAN RJ45 ženski  
unutarnji: 1 x PCI Express x1, V2.1
- Skup čipova: Intel i225V
- Brzina prijenosa podataka:  
Ethernet do 10 Mbps  
Fast Ethernet do 100 Mbps  
Gigabit Ethernet do 1000 Mbps  
NBASE-T s brzinom do 2,5 Gbps  
PCI Express x1 do 4 Gbps
- Podržava IEEE 802.3 / 802.3u / 802.3ab
- Podržava IEEE 802.1Q virtualni LAN (VLAN)
- Podržava buđenje na LAN (WOL)
- Podržava 9k Jumbo okvire
- Podržava PXE
- LED indikator povezivanja i šupljine

### Preduvjeti sustava

- Linux Kernel 5.8 ili noviji
- Windows 10-64
- Računalo s jednim slobodnim PCI Express utorom

### Sadržaj pakiranja

- PCI Express kartica
- Nosač niskog profila
- CD s upravljačkim programom
- Korisnički priručnik

### Predmet br. 89598

EAN: 4043619895984

Zemlja podrijetla: China

Pakiranje: Retail Box

### Slike





General	
Supported operating system:	Windows 10 64-bit
LED indikator:	Link and activity
Interface	
Vanjski:	1 x Gigabit LAN RJ45 jack
Unutarnji:	1 x PCI Express x1, V2.0
Technical characteristics	
Skup čipova:	Intel® i225V v3
Brzina prijenosa podataka:	Ethernet up to 10 Mbps Fast Ethernet up to 100 Mbps Gigabit Ethernet up to 1 Gbps Gigabit Ethernet up to 2.5 Gbps
Physical characteristics	
Slot bracket:	low profile standard